

Transportation and Storage

TRANSPORT


Before transporting the pipes, it is required to fasten them properly. Thermally shrivelling materials and polyethylene joints are transported in containers or boxes. The transportation of pre-insulated pipes and profile parts is allowed when the outside temperature is not lower than -20°C.

STORAGE

Pre-insulated pipes are stored in different levels, on hard ground sites. Only pipes of the same diameter may be stored in the same stack.

Pipes with a diameter of 50-400mm must be stored in a stack, not higher than 1.5m (up to 2m in individual cases) and pipes with a larger diameter than 500mm may be stored only in one row.

Polyethylene joints are stored in vertical position in a storehouse. Profile fittings (bends, three-branches, supports) are stored on shelves, in storehouses.

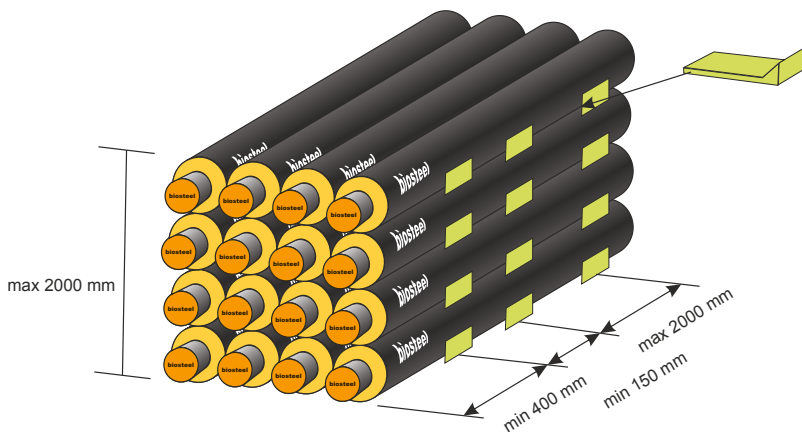

biosteel a/s

Algade 35, Grønbjerg · DK-6971 Spjald, Denmark
+45 4027 8099 · info@biosteel.dk · www.biosteel.dk